


# **ECLIPSE #9800WC-B AUTOMATIC FLUSHING STATION**

**BELOW-GRADE AUTOMATIC FLUSHING STATION  
FOR WARM CLIMATES**

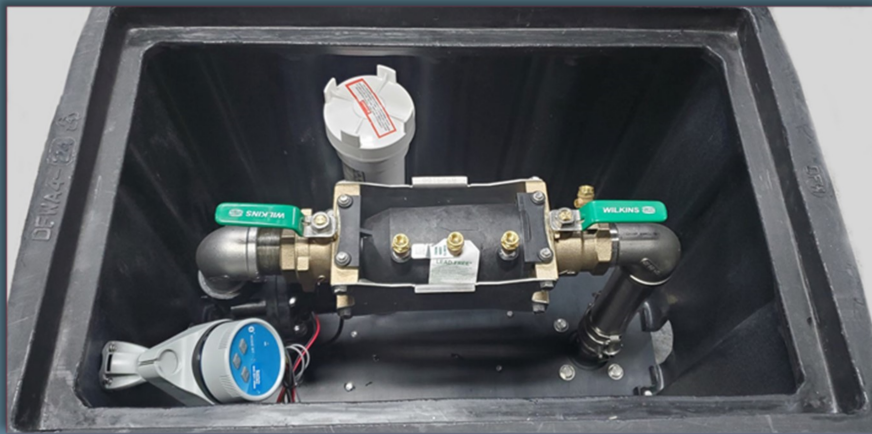

## **Features:**

- **Permanent Station - 2" MIP Inlet**
- **Housed below-grade in polymer meter box**
- **Comes standard with dual check valve (175 PSI rating)**
- **Discharges below grade (storm/sanitary sewer, French drain, etc.)**
- **Controller Operates on 9V battery**
- **Bluetooth or digital controller available**
- **Flowrates up to 200 GPM**
- **Valve Rated to 220 PSI**


**Meter Box Included**




**Saint Louis, Missouri**  
**800-231-8738**  
**hydrants.com**

GENERAL MOUNTING SPECIFICATIONS	
WEDGEMOUNTING	1/2" RE
RESIN	
SLIT MATERIALS	STAINLESS STEEL
CONTINUOUSLY WETTED MATERIALS	STAINLESS STEEL, LOW ALLOY BRONZE
DEPTH OF SLIT	2-4"
MOUNT	TRIO

1 TOP VIEW (METER BOX REMOVED)  
Scale: 3/4" = 1"



ITEM	DESCRIPTION	NOTES
1	WETTER NO. 1	
2	SHUTTLES ELEM	
3	QUICK DISCONNECT	
4	SOLE CORD W/ALF	
5	SHUTTER NO. 2	
6	7' CY W/ALF	
7	DC LATCHING SOLING	
8	CONE OF S.S. ELEM	
9	W/ALF CONTOUR	
10	DISCONNECT SWICH	
11	WETTER NO. 1 LB	
12	CHAINED NOOK	
13	END 7/15	

[illegible]

Unit model # shall be 9800W-C-B as manufactured by Kupferle Foundry Company, St. Louis MO (1-800-231-3990), or approved equal.

NOTES	MONTHS
A. SPRING BY OTHERS	
B. FLUSH LINE BEFORE INSTALLATION OF THE AIRDRAFT	
C. GROUND LINE TWO WAY	
D. IN COORDINATE SQUARES THE RUBBER PIPE SHOULD BE MARKED FOR ADDITIONAL RESISTANCE TO CORROSION. THE RUBBER BECOMES CRACKING AND UNDESIRABLE SPRING AND FITTINGS.	
E. WITH AIRDRAFT'S SHOWN THE ALLOWING MOVES TIME TO GOY AND AVOIDING THE FLAMES.	

INITIALS	DATE
TEAM	
KW	XXX
APP/DO	XXX
MAC/DO	XXX
SHEET SIZE	SCALE
B(11x17)	VALUES



2511 NORTH 9TH STREET  
ST. LOUIS, MO 63102  
1-800-231-3880  
FAX 314-231-2820  
www.hydrants.com

**Saint Louis, Missouri**  
**800-231-8738**  
**hydrants.com**