

ECLIPSE™

NO. 8



**MOST AFFORDABLE
POST FLUSHING HYDRANT
ON THE MARKET!**

FEATURES:

- Plastic Nozzle Cap
- All Brass Working Parts
- Anodized Aluminum Nozzle
- Cast Iron and Steel Construction
- Estimated Flow Rates of 675 gpm
- Custom Locking Wrench Available




2511 NORTH 9TH STREET
ST. LOUIS, MO 63102
1-800-231-3990
WWW.HYDRANTS.COM

THE KUPFERLE FOUNDRY COMPANY

Since 1857



ECLIPSE NO. 8 POST HYDRANT

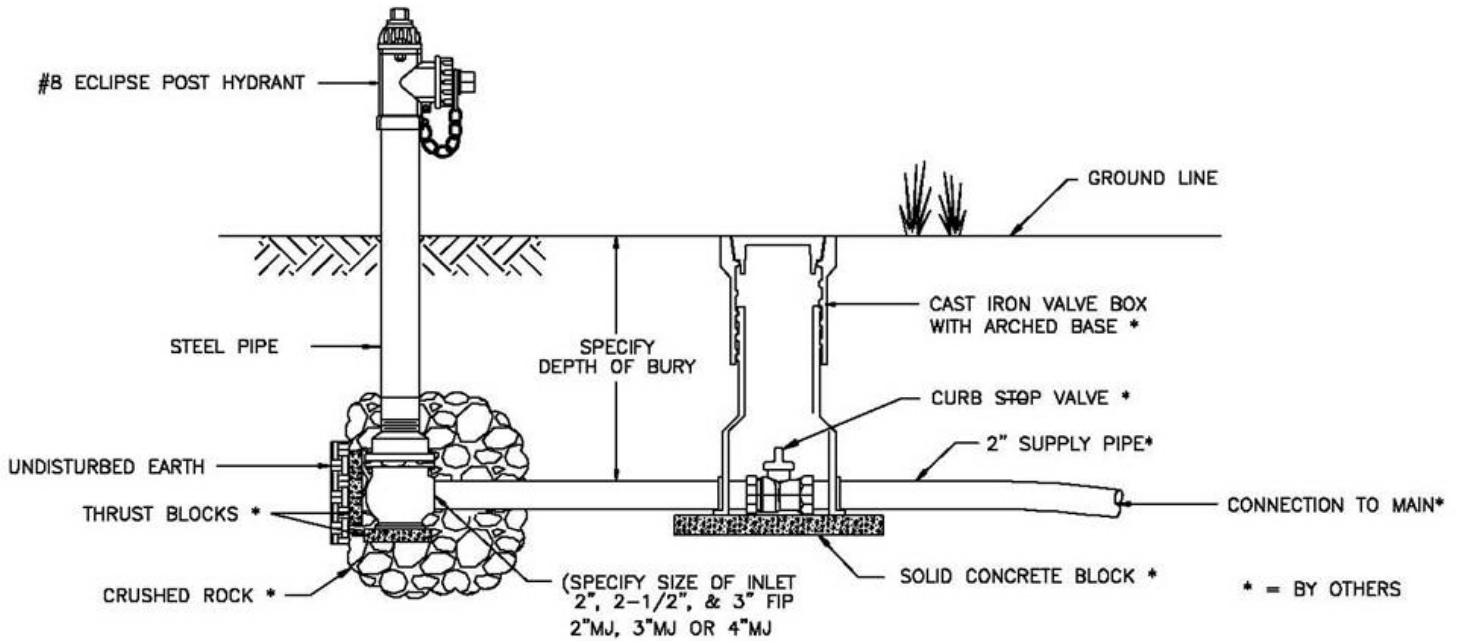


Hydrants shall be self-draining, non-freezing, compression type with 2-3/16" main valve opening. Inlet connection shall be (2" MJ, 3" MJ OR 4" MJ). Outlet shall be 1-1/4", 1-1/2" 2" or 2-1/2" IP or NST).

Hydrants shall have a 3 1/2" steel pipe riser with a cast iron stock top, and non-turning operating rod. Principal interior operating parts shall be brass and removable from the hydrant for servicing without excavating the hydrant.

Hydrants shall be set in 4 cubic feet of crushed stone to allow for proper drainage of the hydrant. Recommendations of the AWWA should be followed when installing the hydrants.

Post hydrants shall be Eclipse No. 8 Post Hydrants as manufactured by John C. Kupferle Foundry Company, St. Louis, MO.

			DRAWN G.B. APPROVED	
			DATE 4/07 MAT'L	
THIS DRAWING IS THE PROPERTY OF THE KUPFERLE FOUNDRY COMPANY. IT IS NOT BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER.			 KUPFERLE FOUNDRY COMPANY 2811 NORTH 8TH STREET, ST. LOUIS, MO 63102 314-281-5738 800-221-9580 FAX 314-218-2820 http://www.hydrants.com	
NO	DATE	REVISION		