


#9800WC-A AUTOMATIC FLUSHING DEVICE WARM CLIMATE, 1 INCH

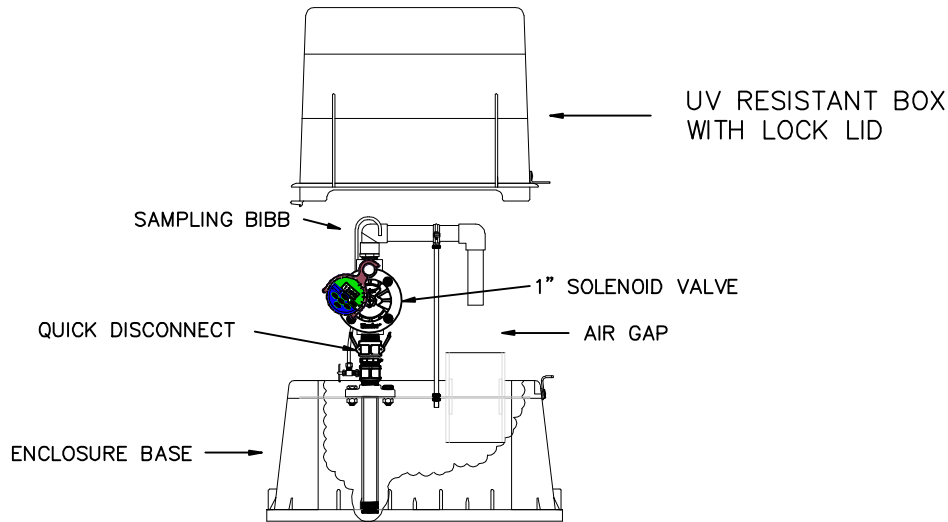

Automatic flushing device shall have a 1" brass MIP inlet leading vertically into a 1" automatic solenoid valve. Automatic solenoid valve shall have an internal, self-cleaning debris screen and have a 150 psi rating. Each unit shall be furnished with a stand-alone controller. Valve controller will not require a second hand-held device for programming. Controller must have a minimum of 12 possible flushing cycles per day, shall be submersible to 12 feet, operate with a 9 volt battery (compartment holds two batteries) and have resin-sealed electrical components. Solenoid shall have no loose parts when removed from valve. When valve opens, flushing water shall move downward through a piece of sewer pipe, hitting a concrete pad and discharging horizontally under locking box. Each unit shall have a double valve, all brass sampling point. Removal of 1" solenoid valve shall be possible via a quick disconnect below the valve. All above-ground components shall be contained within a uv-resistant locking cover as manufactured by Kupferle Foundry Company.

Model 9800WC- CC St. Louis, MO. 1-800-231-3990, or approved equal.

Note: Flush water lines free of debris before installation

| NO | DATE | REVISION |
|----|------|----------|
| | | |
| | | |
| | | |

THIS DRAWING IS THE PROPERTY OF THE KUPFERLE FOUNDRY COMPANY. IT IS NOT TO BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER.

DRAWN
F.M.

APPROVED

DATE
10-30-12

PART NO. 9800WC-A AUTO FLUSHER, 1 INCH, WARM CLIMATE

ECLIPSE
Since 1857



KUPFERLE FOUNDRY COMPANY

2511 NORTH 9TH STREET, ST. LOUIS, MO 63102

314-231-8738 800-231-3990 FAX 314-231-2820

<http://www.hydrants.com>