




#7600 MAINGUARD 4" BLOW-OFF

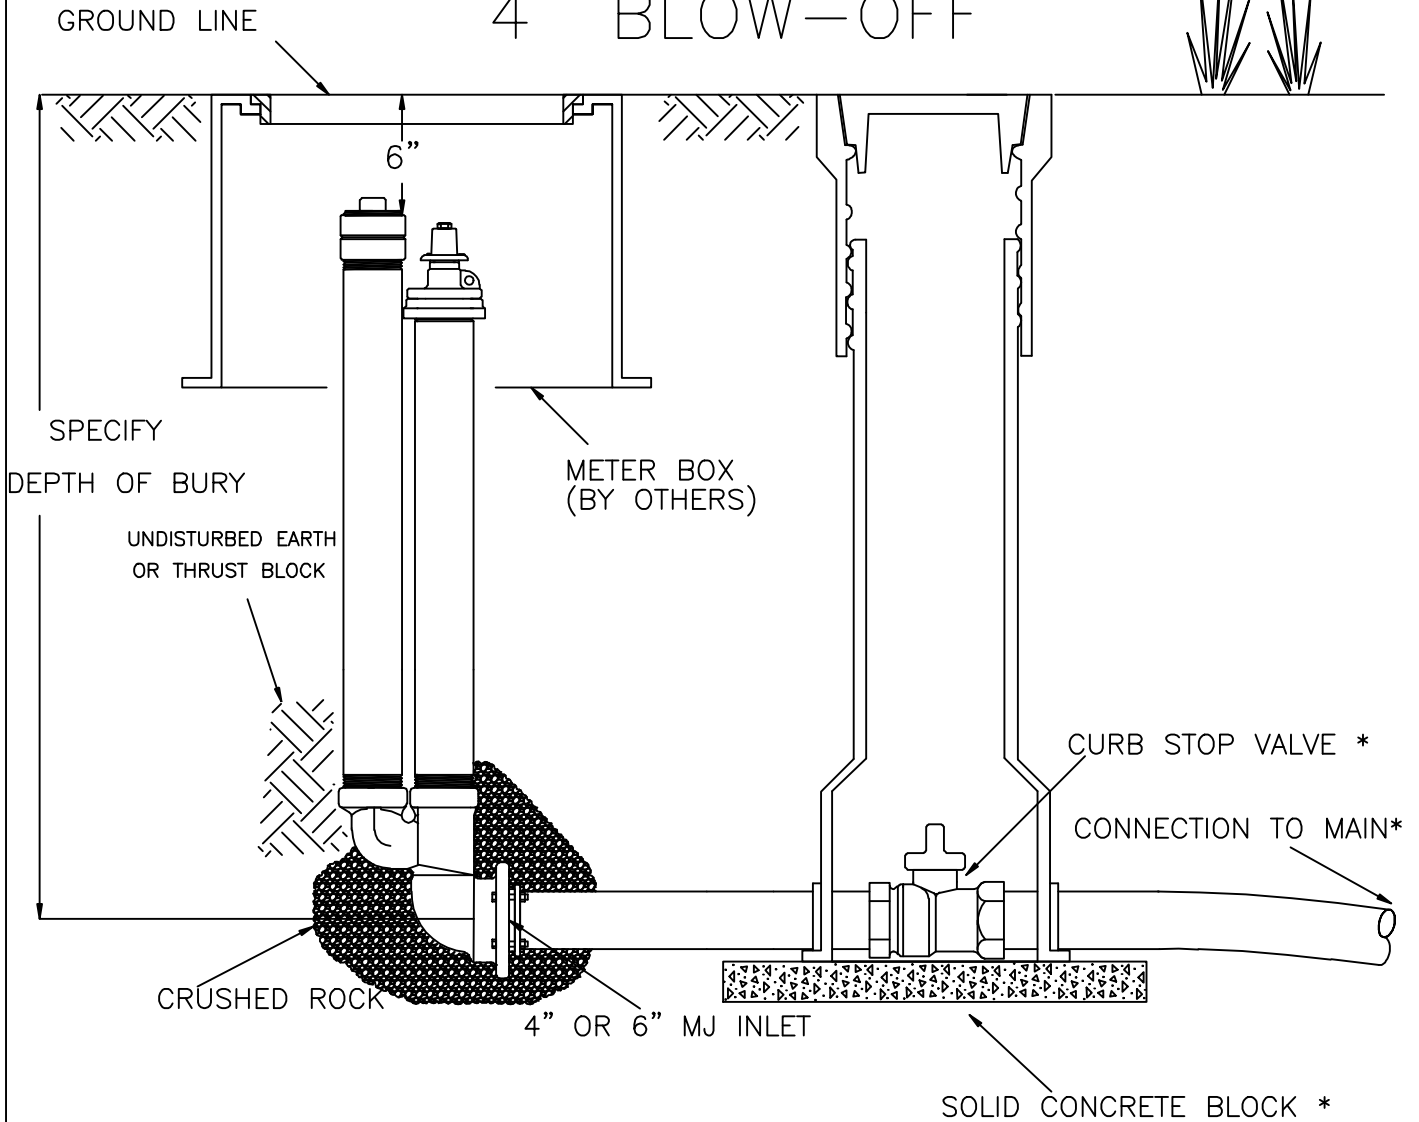

BLOW-OFFS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH A _____' DEPTH OF BURY, SET IN _____ METER BOXES.
 BLOW-OFFS WILL BE FURNISHED WITH A 4" MJ INLET, A NON-TURNING OPERATING ROD AND SHALL OPEN TO THE LEFT. ALL OF THE WORKING PARTS SHALL BE OF BRONZE-TO-BRONZE DESIGN, AND BE SERVICEABLE FROM ABOVE GRADE WITH NO DIGGING. UNITS SHALL OPERATE WITH A STANDARD 2" GATE VALVE WRENCH. WHEN OPEN, VALVE SHALL BE 100% UNOBSTRUCTED AND DRAIN HOLE SHALL BE COVERED. THE OUTLET SHALL BE 4" FIP WITH PLUG AS MANUFACTURED BY KUPFERLE FOUNDRY CO., ST. LOUIS, MO. MODEL #7600, OR APPROVED EQUAL

(SPECIFY OVERALL LENGTH 6" SHORTER THAN NORMAL DEPTH OF BURY. MINIMUM OPENING IN METER BOX SHOULD BE 14")

		DRAWN F.M.		  KUPFERLE FOUNDRY COMPANY 2511 NORTH 9TH STREET, ST. LOUIS, MO 63102 314-231-8738 800-231-3990 FAX 314-231-2820 http://www.hydrants.com
		APPROVED		
		DATE 2-6-13	MAT'L	
DATE	REVISION	PART NO. #7600 MAINGUARD, 4" BLOW-OFF		
		THIS DRAWING IS THE PROPERTY OF THE KUPFERLE FOUNDRY COMPANY. IT IS NOT TO BE USED OR DUPLICATED WITHOUT PERMISSION OF THE OWNER.		