


GENERAL HYDRANT SPECIFICATIONS	
MAXIMUM OPERATING PRESSURE:	220 PSI
NSF/ANSI:	NSF 372
REGULATORY COMPLIANCE:	

MAINGUARD #7600 SIDE INLET 4" BLOW-OFF SPEC SHEET

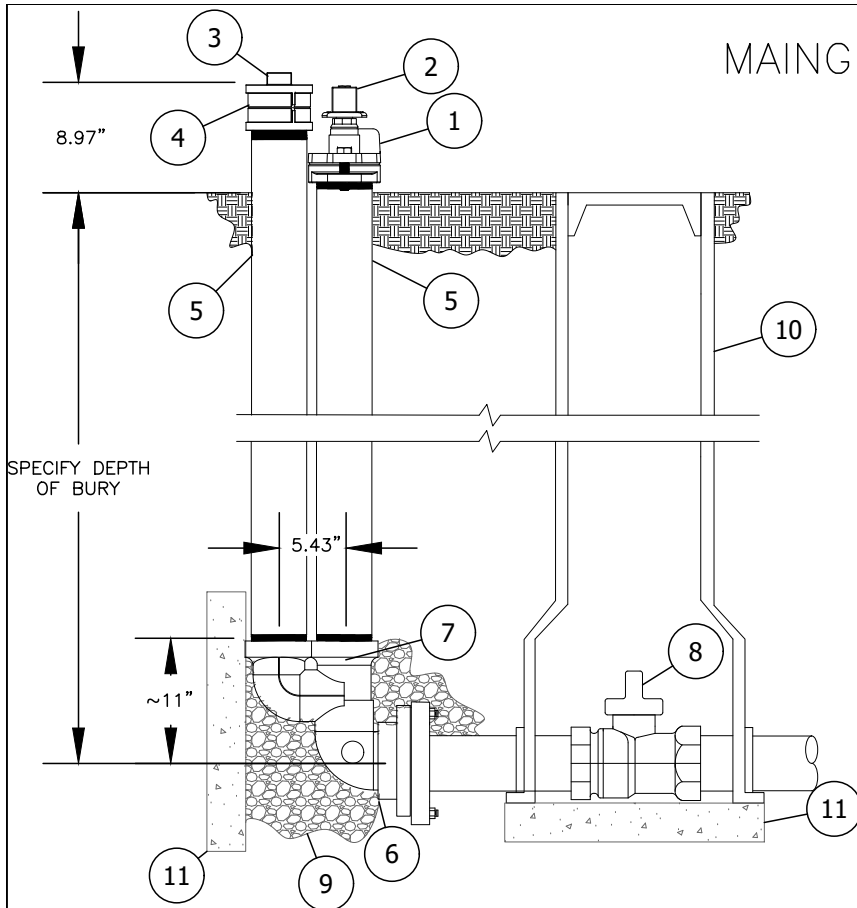

1 SIDE VIEW
Scale: 3/4"=1'-0"


ITEM	ITEM / DESCRIPTION	NOTES
1	TOP CAP	
2	2" SQUARE OPERATING NUT	
3	4" FIP OUTLET	SHOWN WITH PLUG
4	4" COUPLING	
5	4" STEEL PIPE	
6	INLET VALVE BODY	
7	DRAIN HOLE	
8	HYDRANT SHUT-OFF VALVE	BY OTHERS
9	CRUSHED ROCK	BY OTHERS
10	VALVE BOX	BY OTHERS
11	SOLID CONCRETE BLOCK	BY OTHERS

MAINGUARD #7600 BLOW-OFF HYDRANT SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS:

DD/MM/YY	ISSUED FOR ...
DATE	STATUS / REVISION

#7600 Spec Sheet

	INITIALS	DATE
DRAWN	SMS	06/02/17
APPROVED		
MODIFIED	ADC	03/05/26
		SCALE 3/4"=1'-0"



1291 N HIGHWAY DR
ST. LOUIS, MO 63026
1-800-231-3990
FAX 314-231-2820
www.hydrants.com