

MAIN GUARD™

#78 blow-off

2" Below Grade Blow-off hydrant – fits inside your standard meter box

LOCKING COVER

Always furnished, Never an Option!

STANDARD CORP

STOP No Special Operating Wrench needed

DUAL O-RING PLUNGER

Allows for throttling of valve with minimal water loss through drain

IRON NOZZLE CAP Included

STANDARD 45° OUTLET


Vertical outlet available as option

FULL FLOW PIPE

100% Hollow Flow Pipe passes large debris easily!

FULL FLOW VALVE


New Extra-Wide Waterway Delivers Maximum Flow

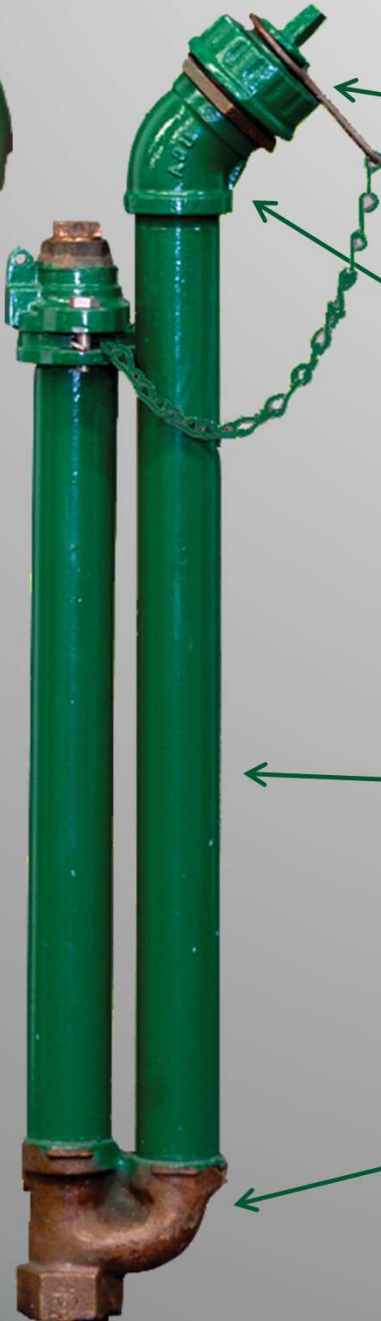

2511 North 9th Street
St. Louis, MO 63102
800-231-8738
Hydrants.com



#78 MAINGUARD HYDRANT VERTICAL INLET

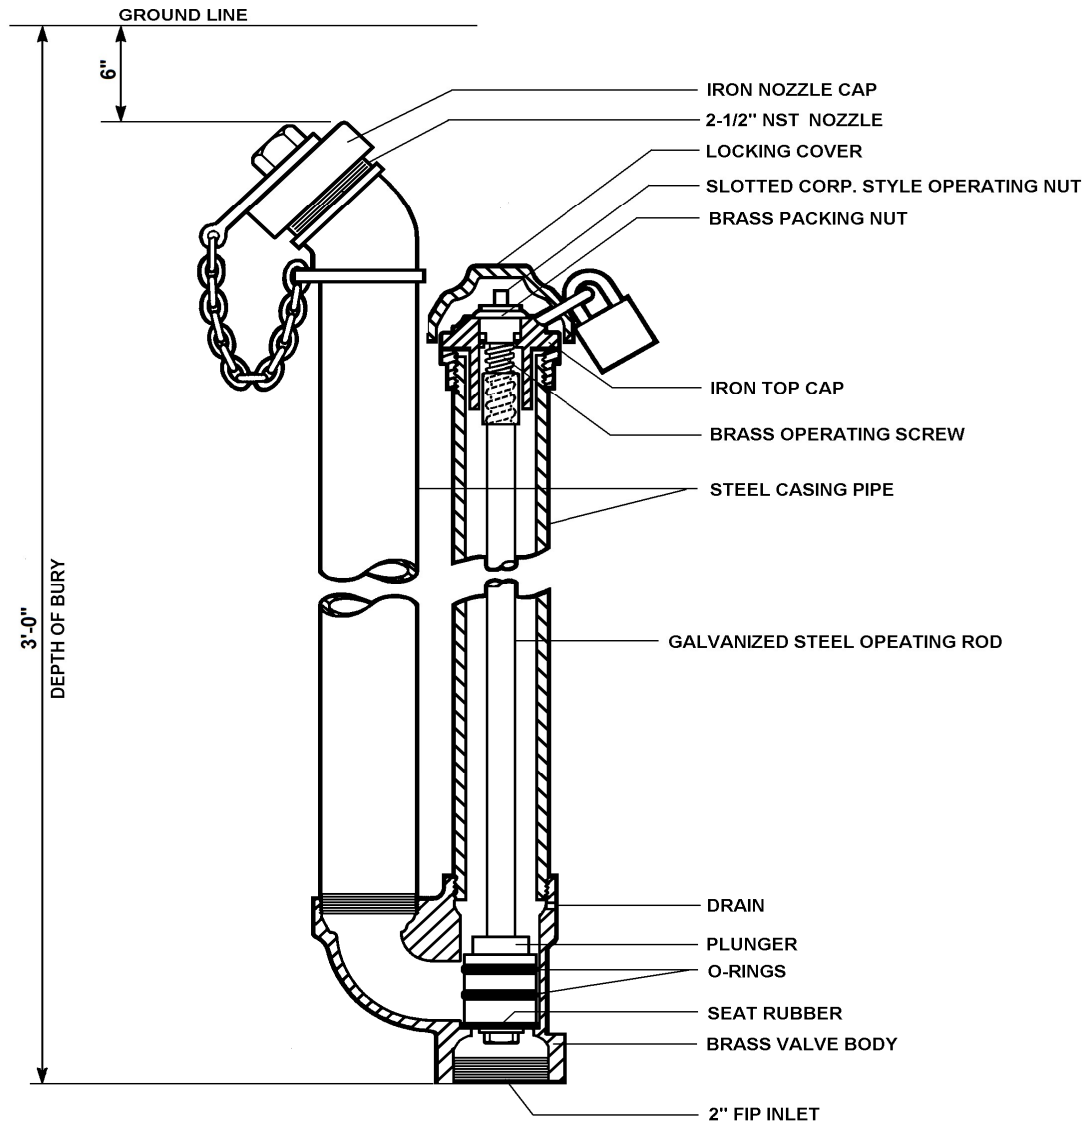

Inlet Pressure (psi)	Flow Rate (gpm)
75	380
100	435
125	488
150	527


ECLIPSE
 Since 1867

KUPFERLE FOUNDRY COMPANY
 2511 N. 9TH STREET, ST. LOUIS, MO 63102
 (314) 231-8738 FAX (314) 231-2820 (800) 231-3990

Dual O-ring plunger design allows for throttling of valve without water waste through the drain.

