


MainGuard #80WD


2" Washdown Hydrant for WTPs/WWTPs

MAINGUARD™

- Unique 2" valve design allows for full flow of water
- Plunger Design allows for throttling of valve
- Standard 10" handwheel for easy opening/closing
- Optional locking cover
- Horizontal and Vertical inlet available
- Optional backflow prevention (vacuum breaker, ball check valves)
- Iron nozzle cap and chain standard
- Multiple outlet options (MIP, NST, Quick Disconnect Adapters, etc.)
- Fully serviceable from above ground—no digging!

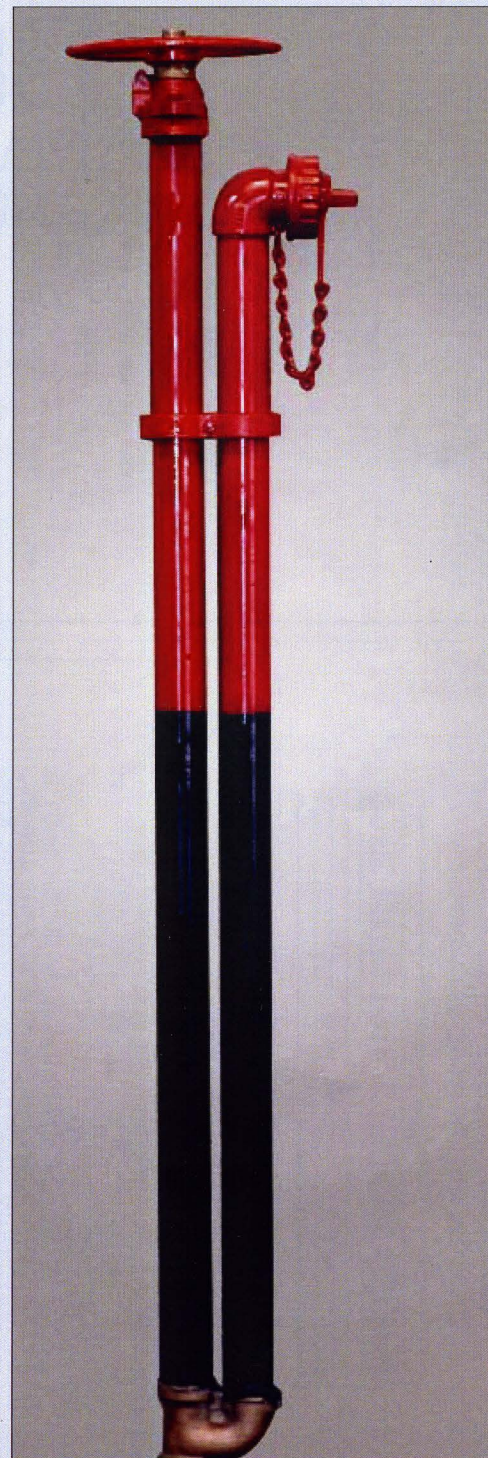


80WD MAINGUARD HYDRANT

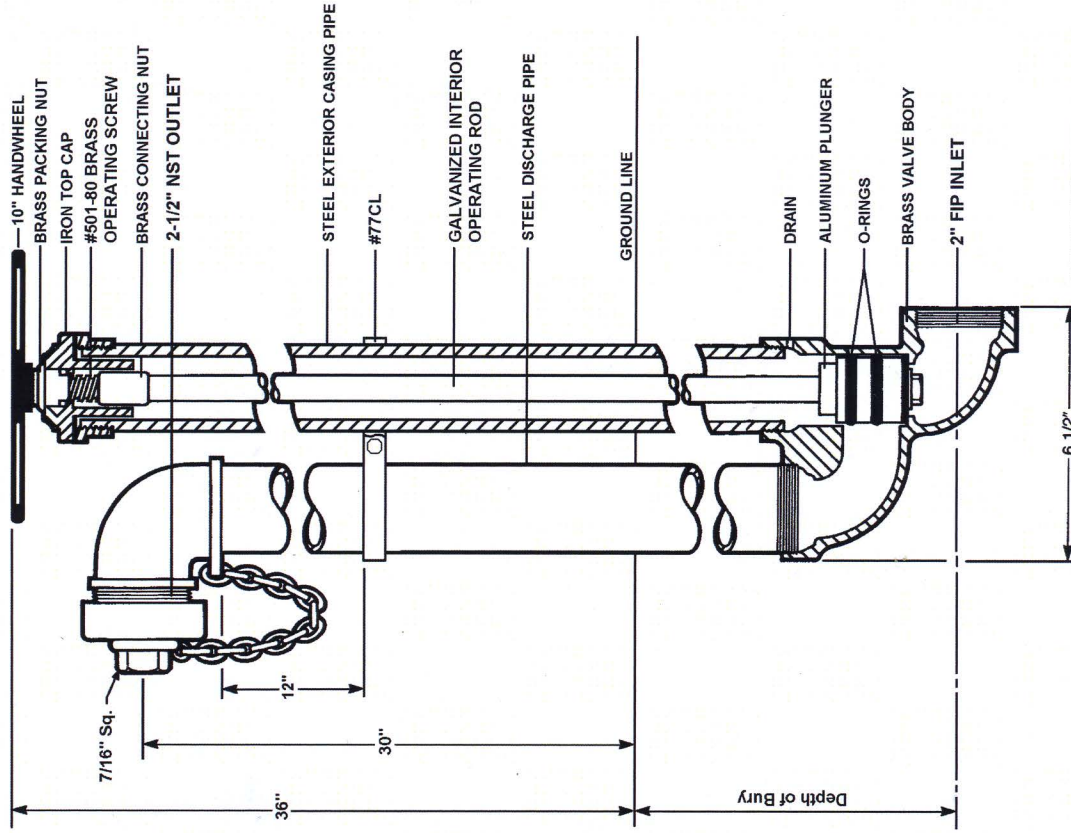

Inlet Pressure (psi)	Flow Rate (gpm)
75	380
100	435
125	488
150	527

KLIPSCH
SINCE 1857
KUPFERLE FOUNDRY COMPANY
2511 N. 9TH STREET, ST. LOUIS, MO 63102
(314) 231-8738 FAX (314) 231-2820 (800) 231-3990

NO. 80WD MAINGUARD HYDRANT

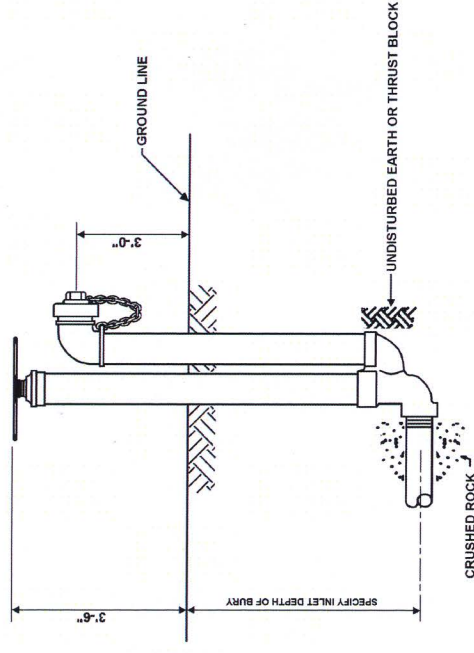

POST HYDRANTS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH A DEPTH OF BURY OF _____. THESE HYDRANTS WILL BE FURNISHED WITH A 2" FIP INLET AND A 2-1/2" NST OUTLET OR SMALLER. HYDRANT SHALL HAVE A NON-TURNING OPERATING ROD AND SHALL OPEN TO THE LEFT. ALL WORKING PARTS SHALL BE BRONZE TO BRONZE DESIGN AND BE SERVICEABLE FROM ABOVE GRADE WITH NO DIGGING. HYDRANTS SHALL BE MANUFACTURED BY KUPFERLE FOUNDRY CO., ST. LOUIS, MO, OR APPROVED EQUAL.

THE KUPFERLE FOUNDRY COMPANY
SINCE 1857

2511 North 9th Street, St. Louis, MO 63102
800-231-3990 Toll Free / 314-231-2820 Fax
www.hydrants.com