

# #903 CORN KING YARD HYDRANT

## COMPRESSION TYPE - NON-FREEZING


### 3/4 in. YARD HYDRANT

#### COMPRESSION TYPE - NON-FREEZING

Valve and Working Parts of Brass - Positive Automatic Drain  
Closes Against the Pressure - No reaction

Removal of nozzle and top cap permits withdrawal of interior  
parts for replacement with ease and without digging up  
or disturbing connection to supply pipe

COMPRESSION

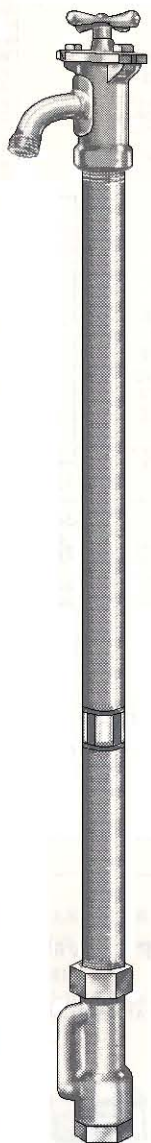


The Plunger operates up and down without twisting movement or torsional strain. When water is admitted into the Valve, the drain outlet is completely sealed by the Cup Washer on the Plunger, without waste of water.

When the Valve is closed after operating, the drain outlet is unsealed or opened, allowing all water in the stand-pipe to escape, preventing the possibility of freezing

Total Eclipse Hydrants and Street Washers involve the employment of "dry and wet" pipe principal of construction.

The outer or dry pipe establishes connection between the Nozzle Section at the top and Brass Valve Body at the bottom and encloses and protects the inside parts. The Inner or "wet" pipe connects the Brass Nozzle Coupling with the Valve Plunger, affording unrestricted passage for the water to the Brass Nozzle Outlet and conserving the water.

COMPRESSION TYPE  
HYDRANT

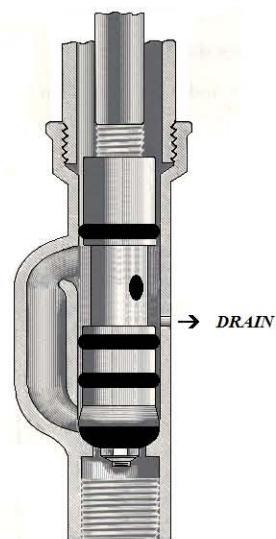

**SIZE:**

3/4" IP Inlet with 3/4" GHT Outlet

**WEIGHT:**

3/4" = 25lbs. @ 3'-0" Std. Depth of Bury  
Plus 5lbs. for every 6" Increment over 3'-0" D.O.B.

Specify Depth of Bury