## Truflo TF300 Post Hydrant

Specify Kupferle's *Premium* Truflo TF300 2" Washdown Hydrant for Potable Water Applications



- All Brass/Bronze and Galvanized Steel Construction
- Optional Riser Pipe and Operating Rod Materials of Construction i.e. Brass, Stainless Steel or Galvanized Steel as shown.
- NSF 372 Compliant, low-lead available
- Outlet Sizes 2½" NST, NPT, NPSH or smaller
- Aluminum or Brass Cam & Groove Quick Disconnect
  Adapters available
- Inlet sizes 1½" or 2" FIP Bronze Vertical or Horizontal or
  2" MJ Bronze Horizontal
- Maintainable from Above Ground, no digging
- Optional Backflow Prevention including Outlet Vacuum Breaker and/or Double Ball Check Valve on Drain
- Four Spoke Ball Wheel Operating Handle
- Optional 10" Operating Hand Wheel
- Optional Outlet Reorientation and/or Break-Away
  Ground Flange
- Unique Valve Delivers Full-Flow (400 gpm)

Truflo #TF300






The Kupferle Foundry Company 2511 North 9<sup>th</sup> Street St. Louis, MO 63102 800-231-3990 / www.hydrants.com Contact us at info@hydrants.com



## **TF-300 POST HYDRANT**

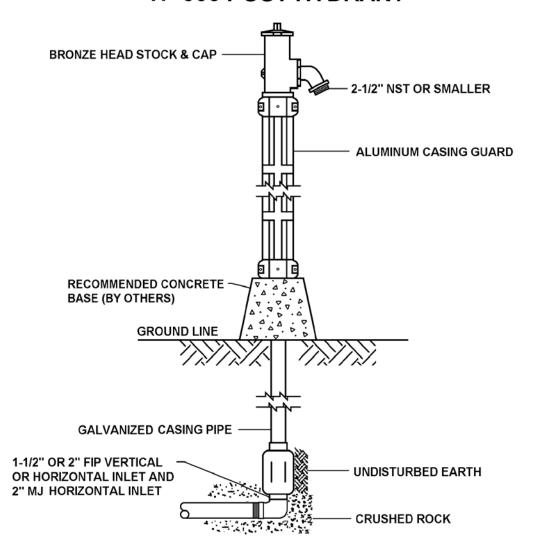

POST HYDRANTS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH A \_\_\_\_\_\_ DEPTH OF BURY. THESE HYDRANTS WILL BE FURNISHED WITH A 2" FIP INLET, A NON-TURNING BRASS OPERATING ROD AND GALVANIZED CASING PIPE. HYDRANT SHALL OPEN TO THE LEFT. ALL WORKING PARTS SHALL BE BRONZE TO BRONZE DESIGN AND SERVICEABLE FROM ABOVE GRADE WITH NO DIGGING. THE OUTLET SHALL ALSO BE BRONZE WITH A 2-1/2" NST NOZZLE OR SMALLER. HYDRANTS SHALL BE MANUFACTURED BY KUPFERLE FOUNDRY CO., ST. LOUIS, MO. OR APPROVED EQUAL.

