


#66WC-BOLLARD SAMPLING STATION SPEC SHEET

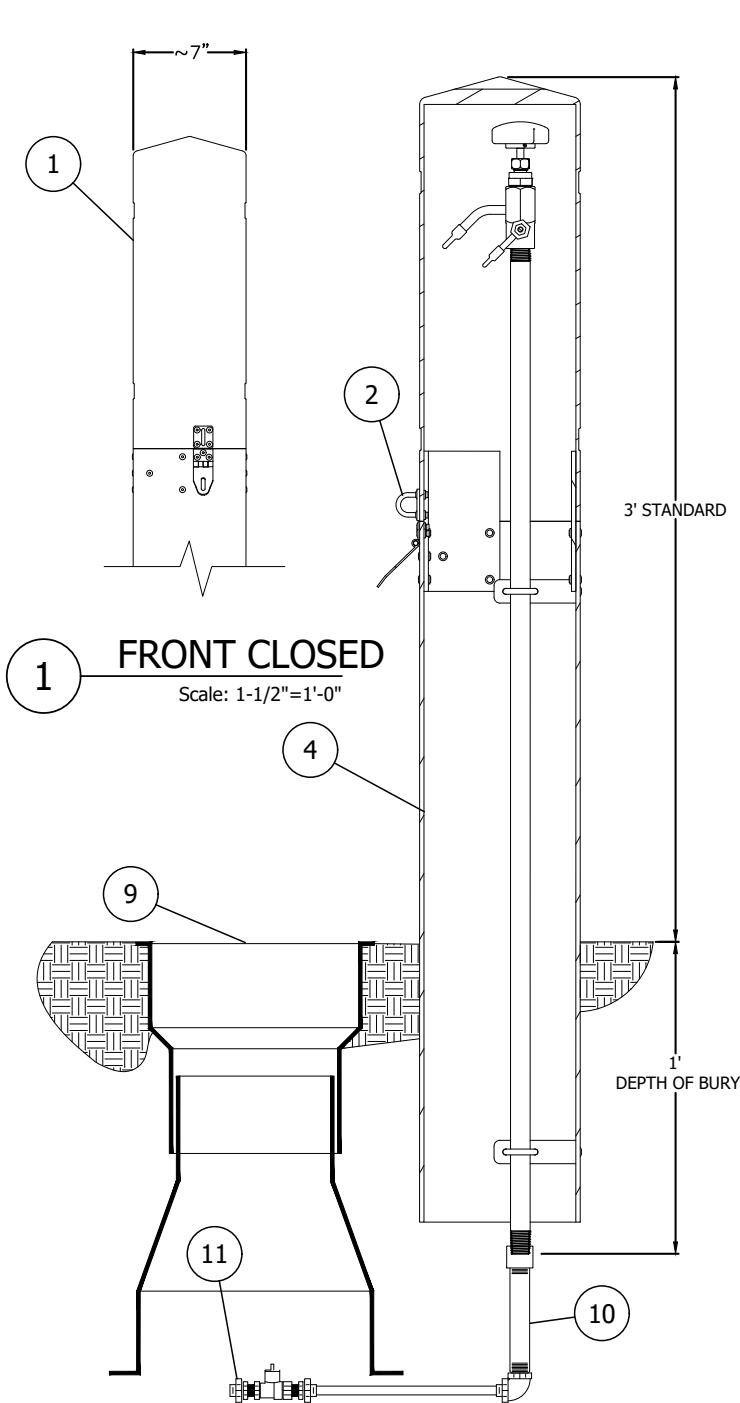

SAMPLING STATION SHALL BE 1' BURY STANDARD, WITH A 1/2" MIP INLET, WITH 1/2" UNTHREADED BLOW OFF AND 1/4" SAMPLING BIBB.

STATION SHALL BE ENCLOSED IN A LOCKABLE, NON-REMOVABLE 7" SQUARE HDPE BOLLARD WITH REMOVEABLE QUICK OPENING LID, ALLOWING FOR 360 DEGREE ACCESS TO THE STATION. THE STANDARD COLOR OF THE ENCLOSURE SHALL BE BLUE WITH AN OPTION OF: TAN, RED, YELLOW AND WHITE. UPON REQUEST, THE LID MAY HAVE TWO REFLECTIVE TAPE STRIPES.

WHEN OPEN, THE STATION SHALL REQUIRE NO KEY FOR OPERATION, AND ALL WATER FLOW SHALL PASS THRU AN ALL STAINLESS STEEL WATERWAY.

ALL WORKING PARTS SHALL BE OF STAINLESS STEEL AND SERVICEABLE FROM ABOVE GROUND WITH NO DIGGING OR REPLACEMENT NEEDED.

A STAINLESS STEEL PETCOCK WILL BE LOCATED BELOW THE BLOW OFF NOZZLE FOR A SAMPLING POINT.

THE STATION SHALL BE MODEL #66WC-BOLLARD AS MANUFACTURED BY THE KUPFERLE FOUNDRY, ST. LOUIS MO. 63102 OR APPROVED EQUAL.


NOTES:
 IN SOME CONDITIONS CORROSION OF STAINLESS STEEL CAN OCCUR (EXPOSURE TO SALT WATER, DIRECT EXPOSURE TO STRONG CHLORIDES, ETC.). PROPER MAINTENANCE OF THE EXPOSED STAINLESS STEEL PARTS USING PROPER STAINLESS STEEL CLEANING AGENTS WILL INCREASE THE LIFESPAN OF THE HYDRANT. IF DESIRED, KUPFERLE CAN ALSO OFFER AN ADDITIONAL PASSIVATION PROCESS FOR ADDITIONAL CORROSION PROTECTION.

#66WC-BOLLARD SAMPLING STATION TO BE INSTALLED AT THE FOLLOWING LOCATIONS:

ITEM	ITEM / DESCRIPTION	NOTES
1	REMOVEABLE LID	
2	PADLOCK EYE	
3	PADLOCK HASP	
4	7" SQUARE BOLLARD	
5	BLOW OFF NOZZLE	
6	OPERATING HANDLE	
7	SAMPLING BIBB	
8	1/2" S.S. WATERWAY	
9	VALVE BOX	BY OTHERS
10	1/2" S.S. COUPLING, NIPPLE AND ELBOW	BY OTHERS
11	HYDRANT SHUT-OFF VALVE	BY OTHERS

PRODUCT ORDERING GUIDE			
MODEL#	66WC-BOLLARD	- WC - 1.0 - *	
SUBSECTION	1	2	3 4
MODEL SHOWN IN VIEW 1: 66WC-BOLLARD-WC-1.0-B			
SUBSECTION DESCRIPTION	MODEL # SUBSECTION	OPTIONS	DESCRIPTIONS
MODEL	1	66WC-BOLLARD	S.S. SAMPLING STATION IN BOLLARD ENCLOSURE
CLIMATE	2	WC	WARM CLIMATES
DEPTH OF BURY	3	1.0	X.X = FEET OF DEPTH OF BURY. ENTER # IN FEET ROUNDED TO NEAREST 0.5 FOOT.
COLOR	4	B	BLUE (STANDARD)
		R	RED
		T	TAN
		W	WHITE
		Y	YELLOW
PLEASE SEE CUT SHEET FOR UPGRADES AND AVAILABLE OPTIONS			

	INITIALS	DATE
DRAWN	KJW	09/29/22
APPROVED	xxx	xx/xx/xx
MODIFIED		



2511 NORTH 9TH STREET
 ST. LOUIS, MO 63102
 1-800-231-3990
 FAX 314-231-2820
 www.hydrants.com

DD/MM/YY	ISSUED FOR REFERENCE
DATE	STATUS / REVISION

#66WC-BOLLARD SAMPLING STATION

SCALE
 1"=1'